



WASTE MANAGEMENT PLAN

38 POINT WALTER ROAD, BICTON




CHILD CARE PREMISES

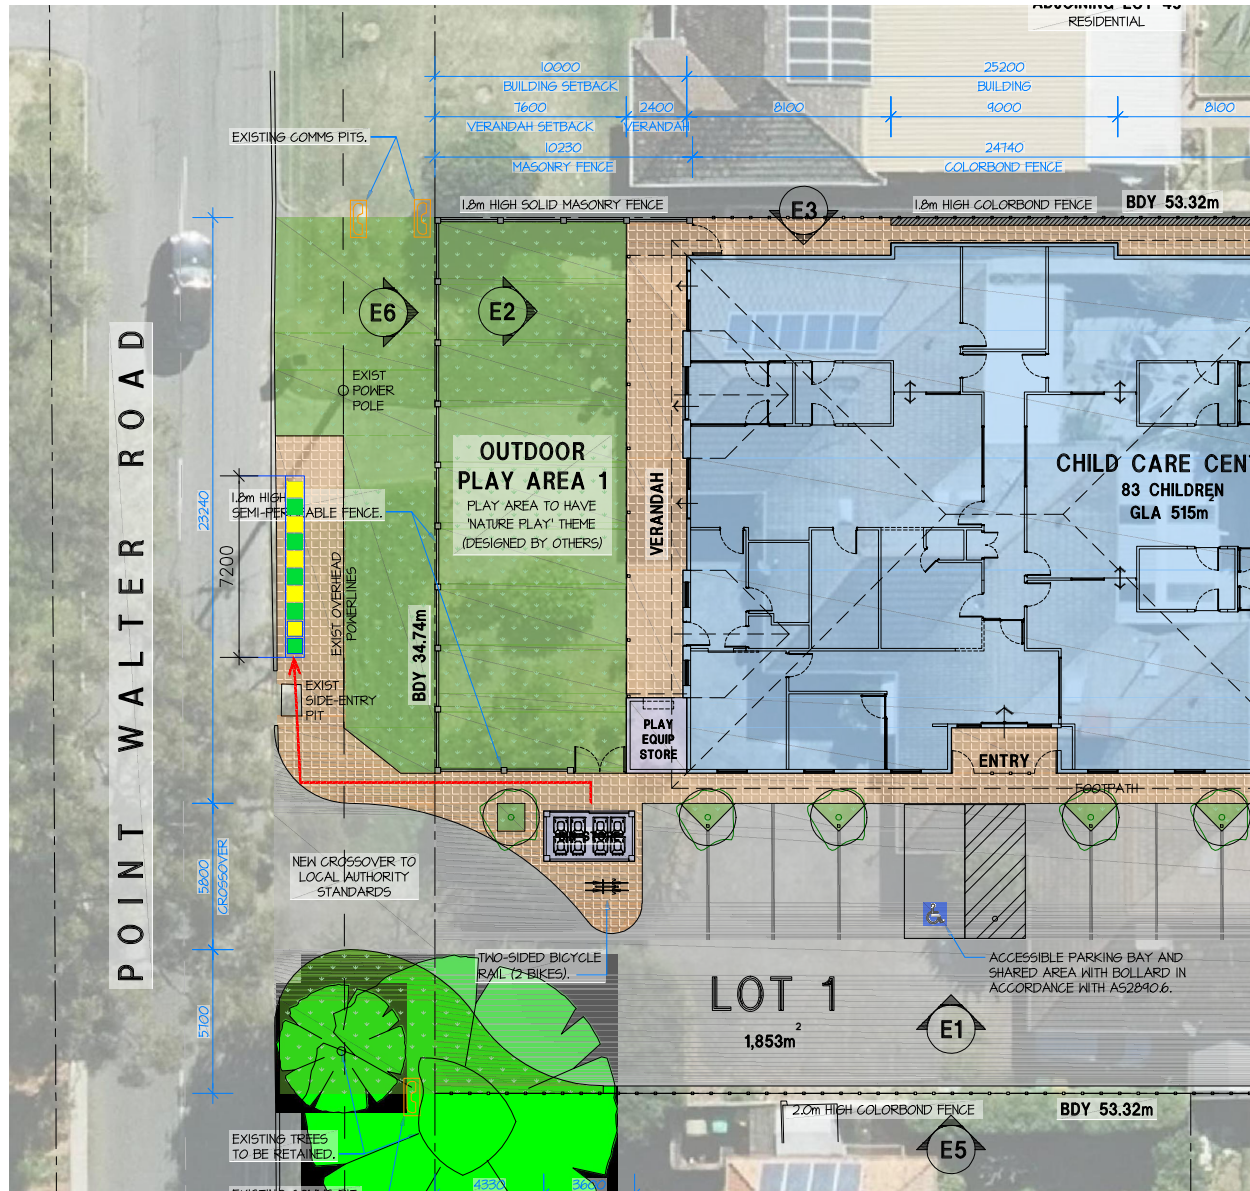

(SOURCE: HINDLEY & ASSOCIATES)

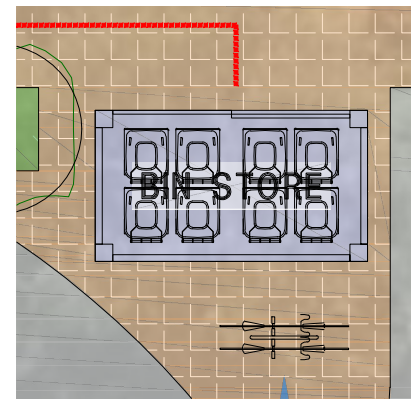

(SOURCE: HINDLEY & ASSOCIATES)

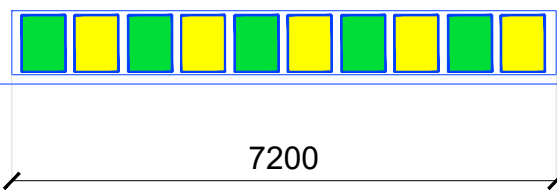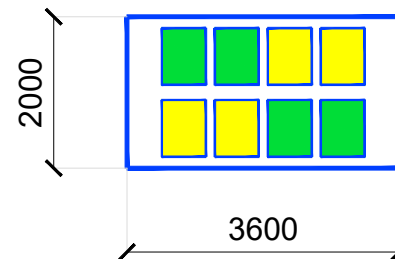

BIN PRESENTATION/COLLECTION AREA
(POINT WALTER ROAD)



PRESENTATION PATHWAY

WASTE MANAGEMENT

- This Waste Management Plan (WMP) applies to the child care premises on the subject land.
- The WMP forms part of the development approval for the child care premises.
- **Demolition and Construction.** Skip bins will be provided on-site for waste associated with the demolition of the existing buildings on the land and during the construction of the child care premises. The skip bins will provide for sorting and recycling of waste to minimise landfill. During construction, sub-contractors are responsible for sorting waste products into appropriate bins where possible. Waste from construction is to be supervised by the builder. Where possible, sub-contractors are to use products that can be reused or easily sorted prior to being sent to landfill. Sub-contractors are to be informed of their responsibilities to maintain site cleanliness and adhere to the waste management practices described herein during demolition and construction.
- **On-site storage.** One (1) bin store to be provided. Bin store floor to be concrete, graded to a floor waste and provided with a hose connection. Bin store walls to be sealed and painted a light colour to facilitate cleaning.
- **Staff.** Staff are to manage bins in the bin area to ensure one bin is full before the next one is used. Staff will present full bins to the bin presentation pad on the verge on collection day (returning when emptied). Staff (or a bin cleaning contractor) responsible for washing waste and recycling bins.
- **Collection.** Kerbside waste collection will take place on Point Walter Road as depicted on this WMP. Kerbside presentation pad will be 7.2m long.
- **Collection management.** Bin presentation/collection pad at the front of the child care premises will be highly accessible and convenient/safe to use by staff.
- Bins will be positioned on the presentation/collection pad on collection day. The City of Melville collection service will empty the bins into its waste and recycling trucks. The City's vehicles will then remove the waste from the verge for processing. On the same day following waste collection, bins will be returned to the internal bin storage area.
- **Notification.** The Operation Management Plan for the child care premises will include this WMP. Owners/staff will be aware of the requirements of the WMP and their responsibilities for waste storage and management as they apply to the site (in accordance with this WMP, as amended).
- **Changes.** Changes to the WMP must be approved by the City of Melville. Should the approved WMP fail to deliver a safe, effective and efficient waste management service, the City will liaise with the owners and/or child care premises management to review, update and approve the WMP.

A WMP 22.03.30 MW 22.03.30 01
 REV DESCRIPTION YY.MM.DD DRAWING NUMBER
 Issued for design intent only. All areas and dimensions are subject to detail design + survey

SCALE 1:300
 SHEET A3

MWURBAN
 planning and development

3/ 210 Queen Victoria Street,
 North Fremantle WA 6159
 www.mwurban.com.au

PO Box 214
 North Fremantle WA 6159